

## FEATURES

- Fixed frame width 51mm
- Two options for mullion installation
- Insect screen can be fitted
- Punching tool available for drain holes, transom/mullion assembly, and louvre holes for variable pitch
- Available in all Profils Systèmes' exclusive colours : Terra Cigala<sup>®</sup>, Maohé<sup>®</sup>, Eclats Métalliques<sup>®</sup>, Profils Color<sup>®</sup>, Terre de Matières<sup>®</sup>
- Colour shades guaranteed up to 25 years

# 015JA SERIES

## Traditional aluminium louver shutter

The JKB Profiles aluminium louvre blind is a window feature blending good looks with ease of fitting, with absolutely no concession to quality and weatherproofing standards.

### SECTIONS

Simple stock management: There are only five sections in the shutter's construction

- Different top and bottom transoms (simple machining and material savings)
- Opening by casement bolt or winding handle
- Insect screen option for clipping to fixed frame

### INNOVATION

2 types of side mullion available :

- Standard side mullions: U-section with slide-in cap assembled onto the straight-cut transom
- Side mullions made from two complementary half-sections, enabling:
  - Access to the mechanism without removing the louvre unit once fitted and sealed
  - Exterior weatherproofing of frames fitted at a height without the need for cranes, aerial platforms, or ladders

### PERFORMANCE

#### WEATHERPROOFING:

For dimension 890 Wx990H / AEV (air, water, wind) test results: A\*3 E\*7A V\*A4


### CLOSURE

Two blind closing systems :

- Casement bolt
- Winding reel (manual or powered)

The notched casement bolt gives three position settings: closed, 45°, and 80°.

An adjustable drive system allows perfect adjustment of the louvres when fitting.

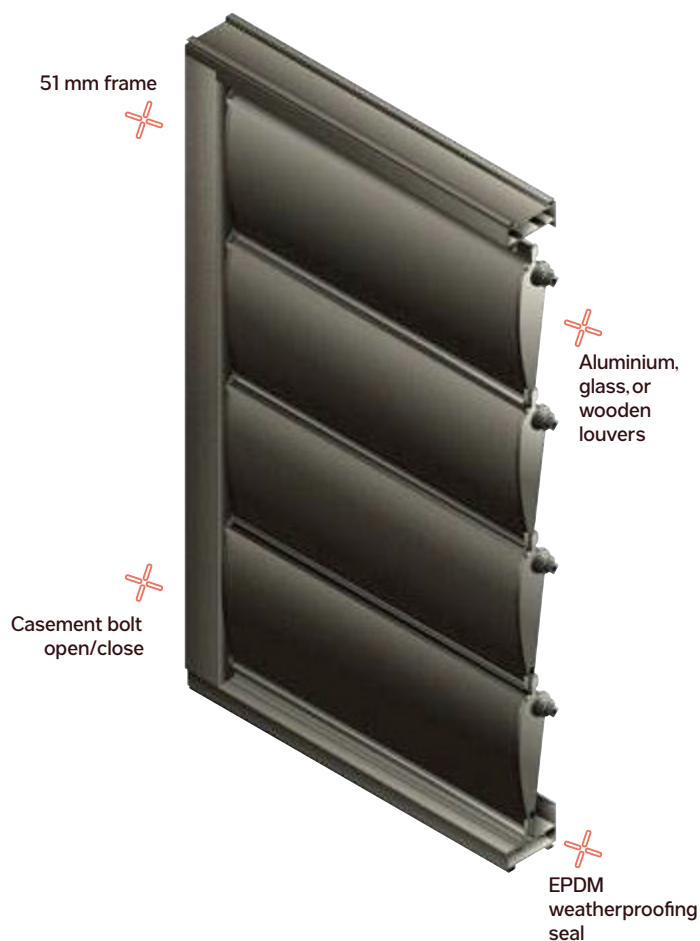

Laquage Garanti



\*Conditions disponibles sur dépliant Garanties réf 094.045



# 015JA SERIES

## Ventilation & security

Ideal for tropical regions, the JKB Profiles aluminium louvre blind guarantees good security with good ventilation and fine management of sunlight entry.

### GLAZING

- The 6mm infill can be glass, aluminium, or other louvers.
- In heights of 120mm, 150mm, or adjustable.

### JOINING SECTIONS


- Adaptor and joining sections available for joining together louvre blind units installed side by side
- With its 51mm frame, the JKB profiles louvre blind is perfectly suited to the FURIO® and FLAMINGO® sash and hinged series

### ASSEMBLY

- The mullions and the control rod can be delivered pre-drilled.
- Machining kept to a minimum: only drain holes assembly of sections, and fitting required.

### SECTIONS

Louvre blind

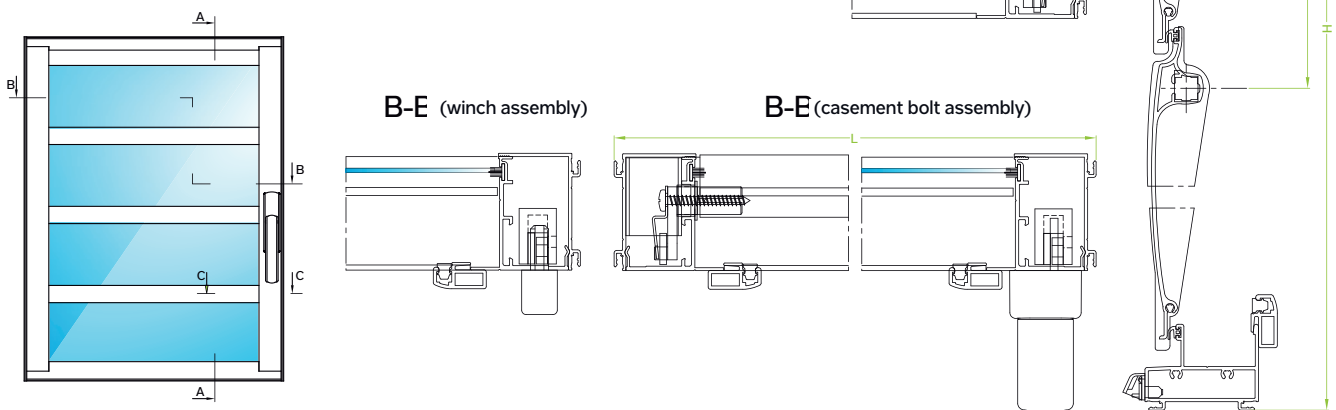

Powder coating guaranteed



abel \*



\*Conditions available on request from Profils Systèmes

**Kaya Frut'e Dam 43**  
**Willemstad**  
**Curaçao**

**Profils**  
SYSTEMES